


USLS SERIES

RoHS
Compliant

0.4mm PITCH CONNECTOR FOR MICRO COAXIAL CABLE (STACKING TYPE)

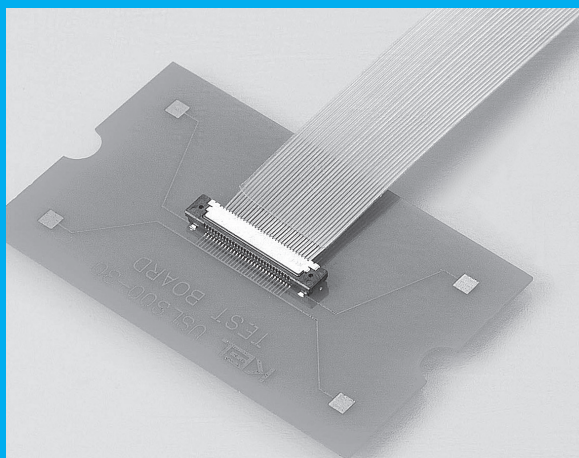

FEATURES

- ▶ Compact connector with a low profile of 1.65 mm(0.065") and a mating width of 3.05 mm(0.120").
- ▶ For micro coaxial cable (#42 AWG).
- ▶ IDC of contacts all together is adopted for improved connection reliability and more compact connectors.
- ▶ Equipped with a metal shell, noise reduction and product strength are ensured.
- ▶ Multiple ground terminals are provided for enhanced transmission characteristics and EMS protection.
- ▶ Highly reliable design with effective mating length of 0.35mm(0.014").
- ▶ Nickel barrier of the board side contact prevents solder wicking.
- ▶ Possible to put through narrow tube with a diameter of $\phi 2.7\text{mm}(\phi 0.106\text{'})$ even after soldering.

*Specially designed withdrawal jig is available.

ORDER CODE

USLS00- - -

① ② ③

*Please order in multiples of the quantity per package.

- ① **[Type]** USLS00 : Receptacle (PCB side connector)
- ② **[Number of contacts]** 20 : 20 pin 30 : 30 pin 40 : 40 pin
- ③ **[Number of packaging]** A : 500pcs. per reel B : 1,000pcs. per reel C : 3,000pcs. per reel

ORDER CODE

USLS20- -

① ②

*Please order in multiples of the quantity per package.

- ① **[Type]** USLS20 : Plug (Cable side connector)
- ② **[Number of contacts]** 20 : 20 pin 30 : 30 pin 40 : 40 pin


*Plug (cable side connector) is composed of base and cover.

SPECIFICATIONS

Material and plating		Electrical characteristics	
Insulator material	Glass-filled LCP(UL94V-0),Black	Rated current	0.25A per contact
Contact material	Copper alloy	Contact resistance	100mΩ max.
Contact plating	Gold over Nickel Nickel Barrier(Board side)	Dielectric withstanding voltage	200V AC for 1minute
Shell material	Copper alloy	Insulation resistance	100MΩ min.at 250V DC
Shell plating	Gold over Nickel(Shell 1) Tin copper over Nickel(Shell 2)	Operating temperature	-40°C to +85°C
Cover material	Glass-filled LCP(UL94V-0),Black	Applicable cable	#42 AWG Micro coaxial cable
Adsorption tape material	[USLS00] Polyimide		



Mating drawing

Unit : mm(inch)

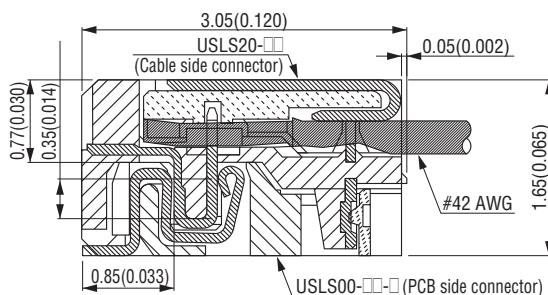


USLS00-□□-□ (Receptacle, PCB side connector)


Unit : mm (inch)

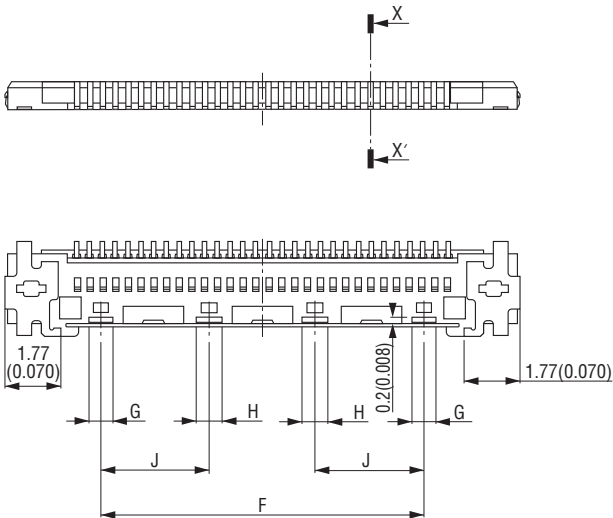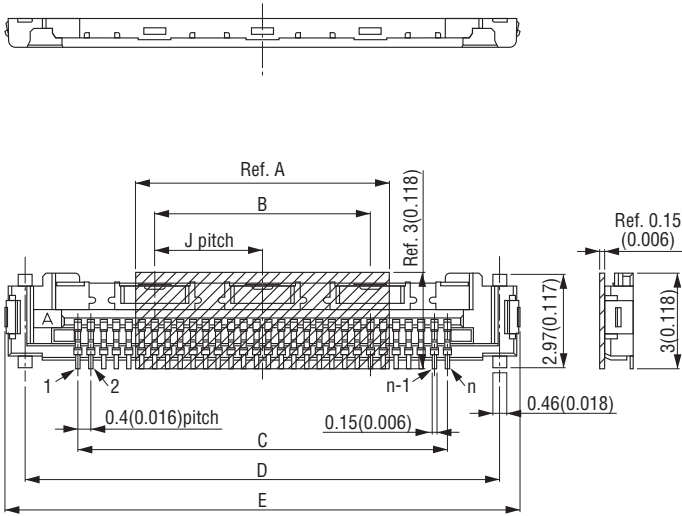

Printed Circuit Board layout (Component side view)

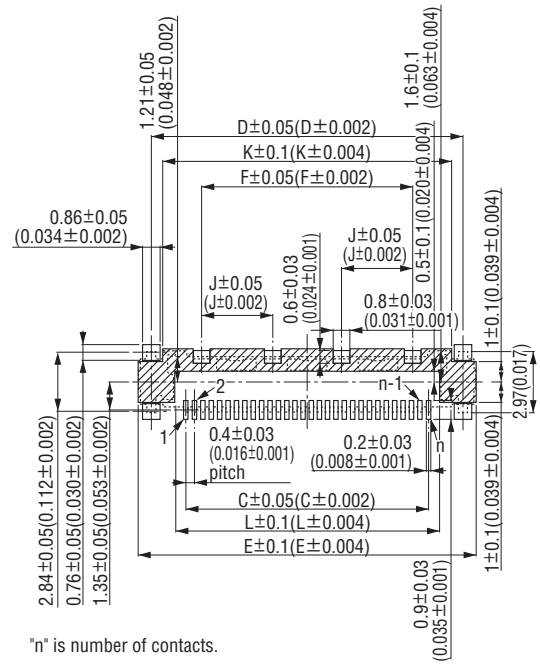

X-X' Cross section

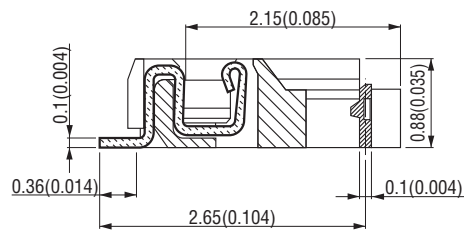

Packaging style
Embossed tape

Product table

Part number	Number of packaging
USLS00-□□-A	500
USLS00-□□-B	1,000
USLS00-□□-C	3,000


Product table / Dimensions

No. of contacts	Part number	A	B	C	D	E	F	G	H	J	K	L
20	USLS00-20-□	5.0 (0.197)	3.1 (0.122)	7.6 (0.299)	10.91 (0.430)	12.14 (0.478)	6.2 (0.244)	0.60 0.024	0.6 (0.024)	3.1 (0.122)	9.8 (0.386)	8.6 (0.339)
30	USLS00-30-□	8.0 (0.315)	6.8 (0.268)	11.6 (0.457)	14.91 (0.587)	16.14 (0.635)	10.1 (0.398)	0.75 (0.030)	0.8 (0.031)	3.4 (0.134)	13.8 (0.543)	12.6 (0.496)
40	USLS00-40-□	8.0 (0.315)	10.5 (0.413)	15.6 (0.614)	18.91 (0.744)	20.14 (0.793)	14.0 (0.551)	0.80 (0.031)	0.8 (0.031)	3.5 (0.138)	17.8 (0.701)	16.6 (0.654)


USLS20-□□ (Plug, Cable side connector)

Unit : mm(inch)




USLS20-□□ Base

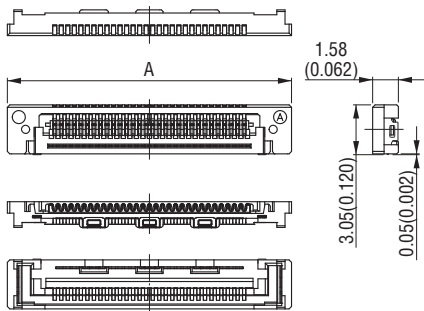

USLS20-□□ CV

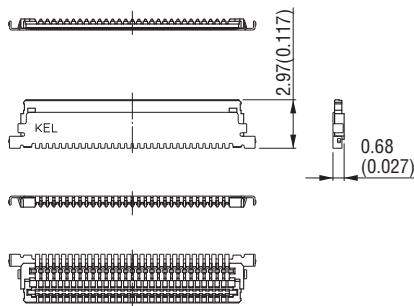

*USLS20-□□Base and USLS20-□□CV are component parts of USLS20-□□.

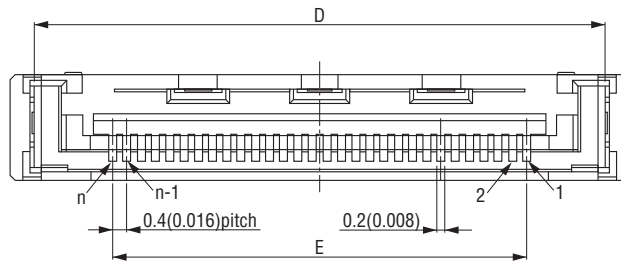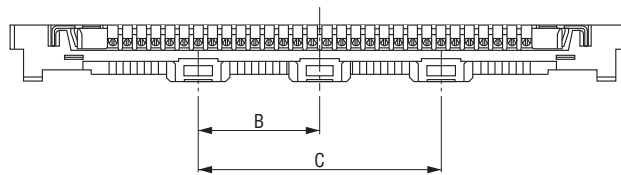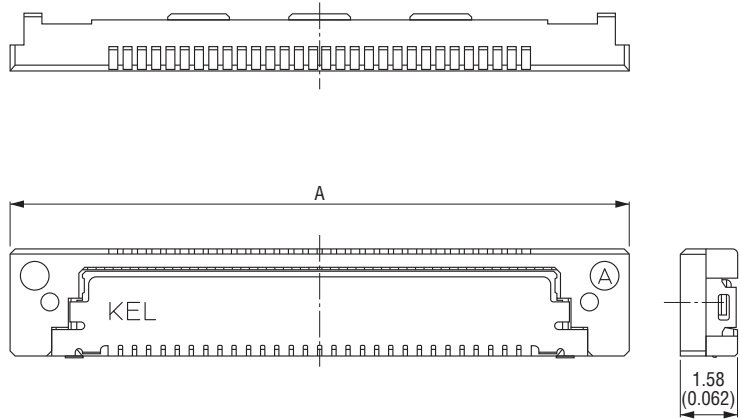

"n" is number of contacts.

Packaging style

Tray

Product table / Dimensions

No. of contacts	Part number	A	B	C	D	E	Number of packaging
20	USLS20-20	13.4 (0.528)	3.1 (0.122)	—	12.0 (0.472)	7.6 (0.299)	160
30	USLS20-30	17.4 (0.685)	3.4 (0.134)	6.8 (0.268)	16.0 (0.630)	11.6 (0.457)	120
40	USLS20-40	21.4 (0.843)	3.5 (0.138)	10.5 (0.413)	20.0 (0.787)	15.6 (0.614)	100

